


5643 BUTTON B

Flush-recessed for \varnothing 48 mm handrail.

APPLICATIONS:

- Handrails
- Cycle paths and pedestrian paths lighting
- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- Flush-recessed
- 316L Stainless steel screws
- Installs in \varnothing 48mm tube with a single \varnothing 35mm

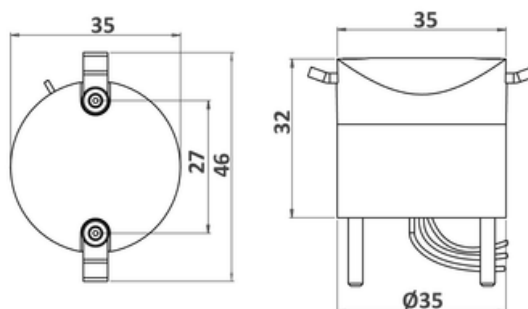

AVAILABLE OPTIONS

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5643-button-b-r1422>

APPLICATION

Outdoor lighting

Standard flux : 223 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

MOUNTING TYPE

Handrails

CARACTERISTICS

Weight : 70 g

Eco Design

Options of luminous effects

Non adjustable

Beam with various openings

Transparent dome (optional)

Power supply - Control

Cable length: 0.2 m

Material

Anodised glazed aluminium

Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

IK10 Resists impacts up to 20 joules (IK10)

IP67 Tight for temporary immersion

5643 BUTTON B

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5643-button-b-r1422>

