

5762 PASSY


Linear spotlight for recessing in public spaces. Can be ordered in two lengths, installed individually or as a continuous line. Externally adjustable tiltable LED plate (0° to 25°) without opening the fitting or compromising its water resistant. Device swivels in its recess for the opposite direction. Clips in with no screws for vandal-proof installation.

APPLICATIONS:

- Medium height facade lighting (10m)
- Highlight architectural features, street furniture, trees...
- Squares and public spaces

Length = 530 mm

- Colourless anodised aluminium body
- Vandalproof organic glass window
- Flush-recessed
- Extruded aluminium profiled recess plate and accessories for continuous line or independent installation
- Cavity in the recess for running the cable and connectors
- Withstands occasional traffic from all kinds of vehicles
- RGBW options available
- anti-glare option available

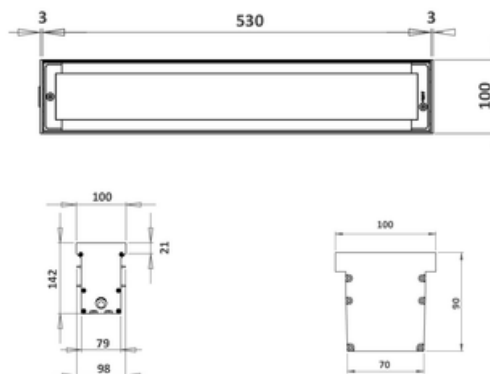

AVAILABLE OPTIONS

Number of LEDs	16
Type of LEDs	Power LEDs. Contact us for hot countries.

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec-lyon.com/5762-passy-r2433>



APPLICATION

-  Outdoor lighting

Standard flux : **3568 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)





MOUNTING TYPE

-  Ground flush recessed fittings
-  Ground recessed fittings


CARACTERISTICS

-  Weight : **3500 g**



Options of luminous effects

-  RGBW option
-  Adjustable on 1 axis
-  Rotating beam
-  Beam with various openings
-  Transparent flat window
-  Colour control system (optional)



Power supply - Control

-  Cable length: **0.53m**

Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

-  Withstands random all vehicles traffic
- 4T** Resists compression up to 4 tons
- IK10 60J** Resists impacts up to 60 joules (IK10)
- IP68** Tight for extended immersion
-  Adjustable orientation without dismantling

5762 PASSY

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5762-passy-r2433>

