

5620

BRUNEI


Recessed lightbar for public spaces. Length on request (max = 2000mm, min = 150mm), can be installed individually or as a continuous line. Clips in with no screws for vandal-proof installation.

APPLICATIONS:

- Illuminated handrail
- Bridge deck lighting
- Direct or indirect lighting of public space

CARACTERISTICS

- Vandalproof profiled organic glass
- Colourless anodised aluminium profile (except 5620X)
- Recessed
- 2 Profiled mounts with extruded-aluminium accessories for continuous line or individual installation.
 - Ground-recessed version with internal space for running cable and connectors
 - Compact surface-mounted
- Version RGB options available

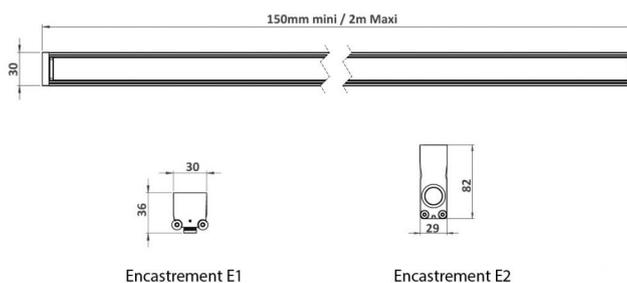

Number of LEDs	120
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec.fr/5620-brunei-r141>

APPLICATION

Outdoor lighting

Standard flux : 1452 lm

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

- Wall lights
- Wall recessed
- Ground flush recessed fittings
- Ground recessed fittings
- Pavements sides
- Handrails

CARACTERISTICS

Weight : 730 g/m

Options of luminous effects

- RGB options
- Non adjustable
- Beam with various openings
- Transparent flat window
- Colour control system (optional)

Power supply - Control

- Cable length: **Connector**
- Integrated** : 24V-PWM
- Remote** : 24V-0/10V, 24V-DMX, 24V-DALI

Material

- AL Anodised glazed aluminium
- VO Vandalism-proof organic glass

Mechanical strength - Waterproofness

- Withstands 2-wheels traffic
- Withstands random all vehicles traffic
- IK10 60J** Resists impacts up to 60 joules (IK10)
- IP68** Tight for extended immersion

5620 BRUNEI

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec.fr/5620-brunei-r141>

