

1820B SANDVIKA

Luminous globe takes up to 4 High-Output LEDs with customisable beam directions.


APPLICATIONS:

- Path lighting
- Technical zones lighting (road or rail tunnels)

CARACTERISTICS

Power supply energy : 230V
Non dimmable

- Organic glass cover
- Colourless aluminium base that can fit bespoke mountings
- Materials unaffected by the corrosive atmosphere in tunnels
- Fireproof safety cable CR1-C1 optional

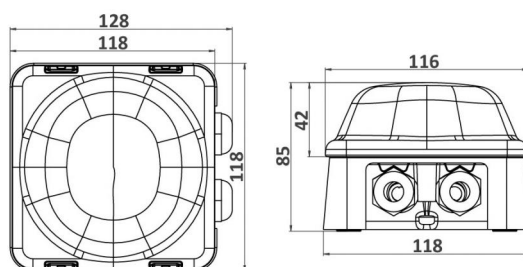

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:
<http://www.lec.fr/1820b-sandvika-r2414>

APPLICATION

-  Outdoor lighting

Standard flux : **892 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT

-  Wall lights

CARACTERISTICS

Weight : **350 g**

Options of luminous effects

- Non adjustable
- Paralell beam
- Transparent dome (optional)


Power supply - Control

- Cable length: **1 m**
- Integrated** : 230V-Non dimmable

Material

- PC 1** Vandalism-proof, UV-proof, polycarbonate window

Mechanical strength - Waterproofness

- IP69 K** pressure water spray (previous registration)
-  Certified in compliance with European Standards 60598-2-22 for emergency lighting units
- IK10 40J** Resists impacts up to IK10 40J
- IP67** Tight for temporary immersion